



MB ENTERPRISE

112 Rajpur Extn, Chattarpur, New Delhi 110068

M: +91 98999 75437, O: 011 26303222


SECTIONAL DOORS

The closing of a loading point requires characteristics of robustness, together with simplicity and speed of use; these Insulating Sectional Doors are custom made to meet individual need based on activation, opening


height and space available on site.

SECTIONAL OVERHEAD DOORS

Sectional Overhead Doors are normally used for shutters in loading-unloading areas, and are installed wherever occurs a frequent transit, as the opening-closing time is smaller. All these doors are delivered provided with manual opening, with chain winch or powered. Due to the wide range of models, with different opening configurations, they fit well with any kind of building and always guarantee a perfect functionality and low maintenance.

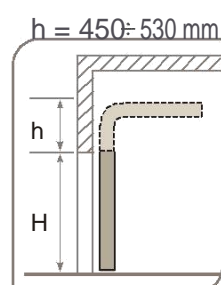

Standard Elevation

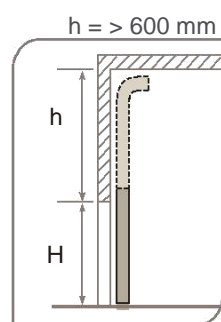


Semi-Vertical Lift




These industrial closing systems guarantees:

- **SECURITY**
Both in terms of in activity, and while the loading points are in use. (due to frequent traffic of goods and operators)
- **INSULATION**
Avoiding temperature losses from inside to outside.
- **EXCEPTIONALLY LONG WORKING LIFE**
Even in conditions of heavy duty use.
- **APPEALING DESIGN**
In order to ensure that the product fits aesthetically into the industrial environment in which it is installed.

Sectional Door meets requirement of robustness, together with simplicity and speed of use. There are many models available that are suitable for perfectly adapting the door and its opening / closing movement to the various sizes of the warehouse.

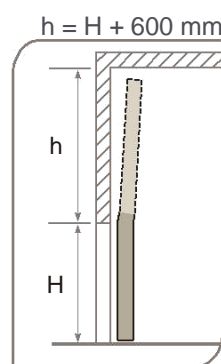

Fully Vertical Lift

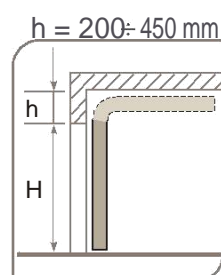

Reduced Lintel



sectional overhead doors




WINDOW

Windows can be offered in different shapes and sizes, based on door size. Window frames are in black rubber and transparent part in Polycarbonate for high strength. Sealing of window is with anti ageing EPDM. On requirement windows can be provided with shock proof Aluminium frame.

DOOR PANEL


Door panels are made from hot galvanized steel with PUF insulation and reinforced at hinge fixing points for strength. Nominal thickness of panel is 50 mm. Insulation used is of highest quality. These panels are available in Standard White colour for Panel height of 600 mm. Other Colours are available on request in Panel height of 500 mm.

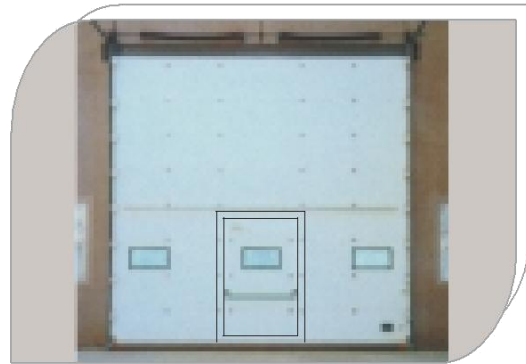


PEDESTRIAN GATE

Pedestrian gate can be provided in doors if same door is being used for material and pedestrian movement. It is also useful as option of emergency exit in panic condition and can be supplied with anti panic handle.


Pedestrian gate is joined into the panel by application of a proper Aluminum frame, and a serial double handle and lock with key. Window can be arranged in pedestrian gate at viewing height.

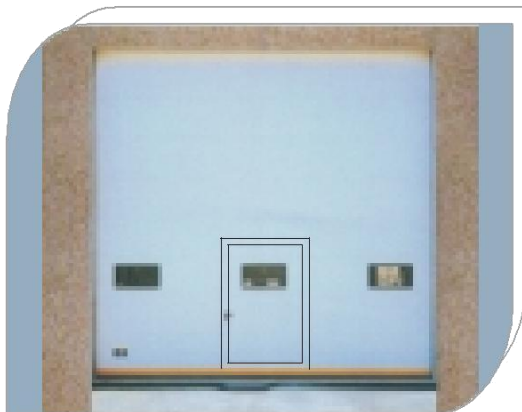


ACTIVATION OPTIONS



Radar Motion Detectors



Induction Floor Loop



Remote Control





Photo Cells




Push Buttons



Pull Switch


There is a solution to suit every loading/unloading- problem on the dock

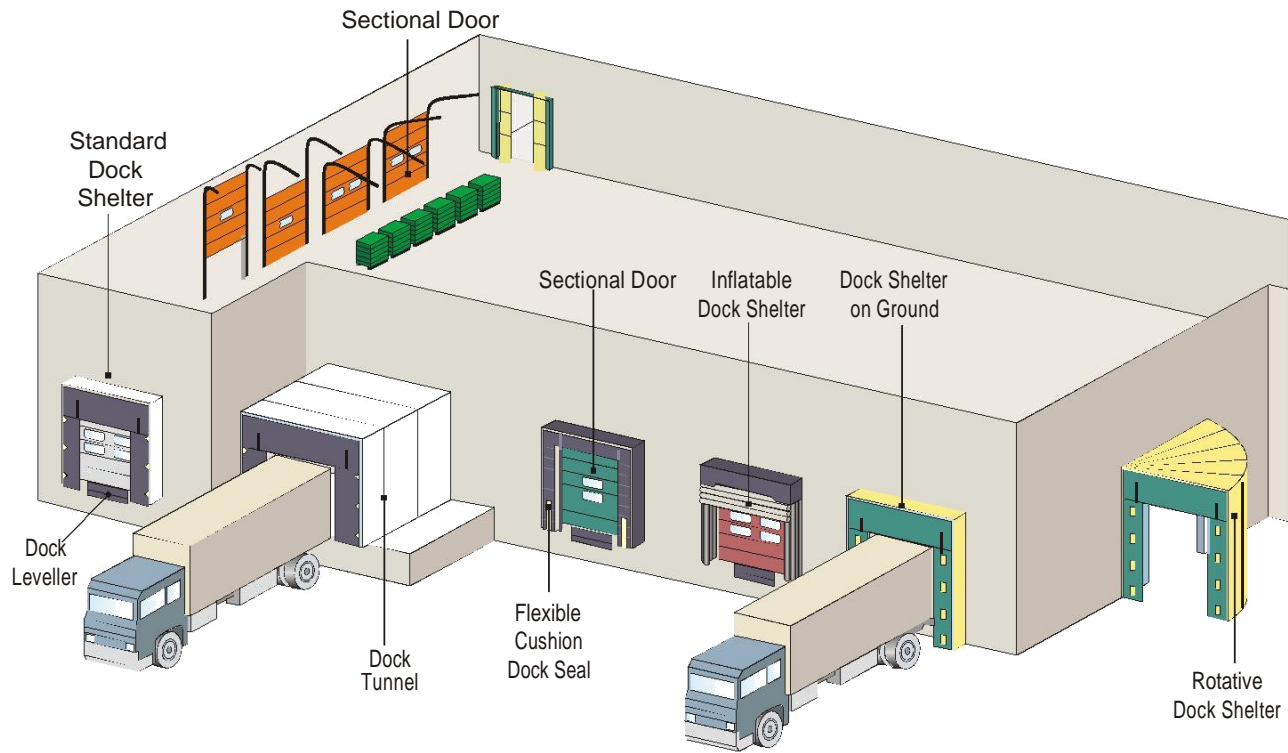

Fix Rubber Bumpers



Vehicle Guide

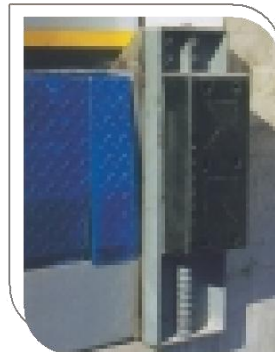

Adjustable Rubber Bumpers

The right product to fit your application ...

Solving your door problems

Doors are manufactured using our proven modular componentry systems and advanced production techniques. We can design, supply and install all of your door requirements quickly and efficiently, to solve your doorway problems, simply and economically.

Information contained herein is to the best of our knowledge and belief, accurate and reliable. Use of any of the materials featured in this catalog is the sole responsibility of the end-user of our product. MB Enterprise has a continuous program of Product Development and reserves the right to change specifications at any time without notice.